

olivetti



d-COLOR P2021 and P2026

COLOUR LASER PRINTERS

The Olivetti d-Color P2021 and d-Color P2026 desktop colour laser printers are the perfect solution, for small and medium size workgroups, offering **high reliability, excellent print quality and low running costs.**

Introducing a new compact design that allows for easy front access. The standard cassette and duplex handle paper up to 163 g/m² up to **A4 format**, whilst the by-pass and optional multi-media cassettes handle paper or envelopes up to **220 g/m²** (PF-530).

With optional paper cassettes fitted, the d-Color P2021 supports up to 1,300 sheets, on-line, and the d-Color P2026 provides up to 2,050 sheets on-line.

Designed to be fast (first print-out time < 9 secs) & responsive, short warm up and calibration time, these models deliver **high productivity.**

Engineered to be **environmentally friendly**, both models are based on long-life component technology, a low ozone emission system, with low noise printing & power consumption system.

SPEED UP TO 21 PPM AND 26 PPM RESPECTIVELY

COMPACT DESIGN & EASY FRONT ACCESS

STANDARD DUPLEX FUNCTION


LARGE PAPER CAPACITY

MULTI-FORMAT AND 220 g/m² PAPER HANDLING

LONG-LIFE PRINTING COMPONENTS FOR A LOW RUNNING COST

**SHORT & EFFICIENT CALIBRATION TIME
LOW FIRST PRINT OUT TIME**

LOW NOISE PRINTING & OZONE EMISSION

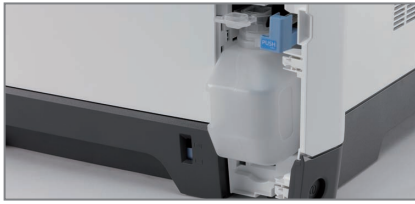

FRONT ACCESS EASE OF OPERATION



HIGH PAPER HANDLING FLEXIBILITY



EASY CONSUMABLES REPLACEMENT

TECHNICAL SPECIFICATIONS

PRINTER	Printing method	Laser (Electrophotographic four colour)	Interfaces	USB 2.0 (Hi-Speed) (2 x ports with the d-Color P2026)
	Print Speed	d-Color P2021: up to 21 ppm colour and mono d-Color P2026: up to 26 ppm colour and mono		USB Host interface
	Time to first print	d-Color P2021: < 10.5/12 sec. mono/colour d-Color P2026: < 9.0/10.5 sec. mono/colour		Fast Ethernet 10/100Base-TX
	Warm-up time	d-Color P2021: < 32 sec. d-Color P2026: < 29 sec.	Emulations	PCL6 (5e,XL) KPD3 (=PS3 Compatible), XPS, PDF Direct Print 1.5, PRESCRIBE, Pull Print
	Processor	PC464 - 667MHz	Operating Systems	Windows 2000/XP/Vista/7, Server 2003/2008, Mac OS X 10.2 or superior, Linux, Unix
	Memory RAM	Standard 256 MB expandable to 1,280 MB		
	Resolution	600 x 600 dpi multi-bit	Fonts	93 scalable PCL6/KPDL3, 8 Vista, 1 bitmap, 45 barcodes + PDF-417
PAPER HANDLING	Output Capacity	250 sheets (80 g/m ²), facedown	Media Weight	Cassette: 60-163 g/m ²
	Cassette/Multi PF PF-520/PF-530 - Optional	A4, A5, A6, B5, Legal, Letter, Folio, Envelopes, Custom (max 70 x 148mm-216 x 356mm)		By-pass: 60-220 g/m ²
	Paper Capacity (80g/m ²)	d-Color P2021: 250-sheet cassette 50-sheet MPT Max 1,300-sheet with options d-Color P2026: 500-sheet cassette 50-sheet MPT Max 2,050-sheet with options		Optional: Normal PF-520: 60-163 g/m ² Multi PF-530: 60-220 g/m ²
GENERAL	Duplex Print Function	Standard 60-163 g/m ² A4, A5, B5, Legal, Letter, Custom	Power supply	220-240 V, 50/60 Hz
	Monthly average print volume	d-Color P2021: up to 2,800 pages d-Color P2026: up to 10,000 pages	Dimensions (WxDxH)	d-Color P2021: 390 x 523 x 370 mm d-Color P2026: 390 x 523 x 397 mm
	Noise level (ISO 7779/9296)	Printing: 50 dB(A) Stand-by: 30 dB(A) Sleep: inaudible	Weight	d-Color P2021: approx. 28.0 kg d-Color P2026: approx. 31.5 kg
	Power consumption	d-Color P2021 / d-Color P2026 Sleep mode: 5W / 7W Stand-by: 57W / 58W Printing: 360W / 428W	Consumables (ISO/IEC 19798)	d-Color P2021: Toner Capacity: K 3,500/CMY 2,800 pages Starter Toner Capacity: K & CMY 1,200 pages d-Color P2026: Toner Capacity: K 7,000/CMY 5,000 pages Starter Toner Capacity: K 3,500/CMY 2,500 pages Maintenance Kit: 200,000 pages
OPTIONS	Interfaces (IB-23)	10Base-T/100Base-TX Multi-protocol fast Ethernet: TCP/IP, IPX/SPX NetBEUI and AppleTalk	Paper cassette	PF-520: 500 sheets - A4-A5 / 60-163 g/m ² PF-530: 500 sheets - A4-A5 / 60-220 g/m ²
	Hard Disk (HD-5a)	d-Color P2026: 40 GB		d-Color P2021: can fit a max. of 2 optional cassettes d-Color P2026: can fit a max. of 3 optional cassettes

Product performances are referred to an appropriate use under optimal conditions.

The registered trademarks are the property of their respective owners.

The support and availability of the listed specifications and functionalities varies depending upon operating systems, applications, network protocols as well as network and system configurations. All information relating to specification and accessories is subject to change without notice.

Olivetti does not guarantee that any prices or specifications mentioned will be error-free. d-Color P2021 and d-Color P2026 are distributed by Olivetti S.p.A.

(02/11) - Code: 27941-00

OLIVETTI UK LIMITED.
500 AVEBURY BOULEVARD
MILTON KEYNES, MK9 2BE
www.olivetti.co.uk

